ATENT COOPERATION TRUE, TY

To:

From the INTERNATIONAL BUREA	٩U
------------------------------	----

PCT

NOTIFICATION OF ELECTION

(PCT Rule 61.2)

United States Patent and Trademark Office

(Box PCT) Crystal Plaza 2 Washington, DC 20231 ÉTATS-UNIS D'AMÉRIQUE

in its capacity as elected Office

26 January 1999 (26.01.99)

International application No.
PCT/SE98/00970

A

Applicant's or agent's file reference TP 1239

International filing date (day/month/year) 22 May 1998 (22.05.98)

Date of mailing (day/month/year)

Priority date (day/month/year)
29 May 1997 (29.05.97)

Applicant

ANDERSSON, Thorbjörn et al

1.	The designated Office is hereby notified of its election made:
	X in the demand filed with the International Preliminary Examining Authority on:
	15 December 1998 (15.12.98)
	in a notice effecting later election filed with the International Bureau on:
2.	The election X was
	made before the expiration of 19 months from the priority date or, where Rule 32 applies, within the time limit under Rule 32.2(b).

The International Bureau of WIPO 34, chemin des Colombettes 1211 Geneva 20, Switzerland

Authorized officer

Mougamadou Abidine

Telephone No.: (41-22) 338.83.38

Facsimile No.: (41-22) 740.14.35

PATENT COOPERATION TREATY

PCT

INTERNATIONAL SEARCH REPORT

(PCT Article 18 and Rules 43 and 44)

Applicant's or agent's file reference TP 1239	FOR FURTHER ACTION		Transmittal of International Search Report 0) as well as, where applicable, item 5 below.
International application No.	International filing date	e (day month year)	(Earliest) Priority Date (day/month/year)
PCT/SE 98/00970	22 May 1998		29 May 1997
Applicant			
Tetra Laval Holdings & Fi	nance S.A. et al		
This international search report has been prepared by this International Searching Authority and is transmitted to the applicant according to Article 18. A copy is being transmitted to the International Bureau. This international search report consists of a total of3 sheets.			
X It is also accompanied by a			his report
1. Certain claims were found u	unsearchable (See Box I).		
2. Unity of invention is lacking	g (See Box II).		
international search was ca	rried out on the basis of iled with the international urnished by the applican but not accom	the sequence listing application. It separately from the panied by a statem beyond the disclosu	r amino acid sequence listing and the g ne international application, nent to the effect that it did not include re in the international application as filed.
	he text is approved as su he text has been establish		
th in		ed, according to Ri may, within one mo	ule 38.2(b), by this Authority as it appears onth from the date of mailing of this inter-
X b	published with the abstrates suggested by the applicate of the applicant fail because this figure better	eant. ed to suggest a figu	

The demand must be filed directly with the competent International Preliminary Examining Authority or, if two or more Authorities are competent with the one chosen by the applicant. The full name or two-letter code of that Authority may be indicated by the applicant on the line below:

PCT

CHAPTER II

DEMAND

under Article 31 of the Patent Cooperation Treaty:
The undersigned requests that the international application specified below be the subject of international preliminary examination according to the Patent Cooperation Treaty and hereby elects all eligible States (except where otherwise indicated).

For	r International Preliminary	Examining Authority	vuse only
Identification of IPEA		Date of receipt of DEMAND	
Box No. I IDENTIFICATION OF T	HE INTERNATIONAL	APPLICATION	Applicant's or agent's file reference TP 1239
International application No.	International filing date	(day/month/year)	(Earliest) Priority date (day/month/year)
PCT/SE98/00970	22-05-199	8	29-05-1997
Title of invention An extruded material for produci			well as a method and
Box No. II APPLICANT(S)			,
Name and address: (Familynamefollowedby, The address must include p TETRA LAVAL HOLDING Av. Général-Guisan CH-1009 PULLY Switzerland	S & FINANCE S	_	Telephone No.: 41 21729 22 11 Facsimile No.: 41 217 29 27 59 Teleprinter No.: 041 2145 58 11
State (that is, country) of nationality:	СН	State (that is, country	 y/ofresidence: Switzerland
Name and address: (Familynamefollowedby Andersson, Thorbjör Assarhusavägen 56 S-240 17 S:a Sandby	rn	ull officialdesignation. The	e address must include postal code and name of country.)
State (that is, country) of nationality:	SE	State (that is, country	y) of residence: Sweden
	givenname; for a legalentity f	l · ull officialdesignation. Th	e cddress must include postal code and name of country:)
State (that is, country) of nationality:	SE	State (that is, countr	y)ofresidence: Sweden
Further applicants are indicated or	n a continuation sheet.		

Sheet No. 2

International application No. PCT/SE98/00970

Continuation of Box No. II APPLICANT(S)		
If none of the following sub-boxes is used, this sheet should not be included in the demand.		
Name and address: (Familyname followed by given name: for a legal en	ity, full official designation. The address must include postal code and name of country.)	
Bentmar, Mats Hästhovsgatan 8 S-233 37 SVEDALA, Sweden	- ·	
State (that is, country) of nationality:	State (that is, country) of residence: Sweden	
Name and address: (Family name followed by given name; for a legal en	tity, full official designation. The address must include postal code and name of country.)	
Dalholm, Patrik Styrbjörn Starkes gränd 6 S-224 77 Lund, Sweden	<i>e</i> :	
	•	
State (that is, country) of nationality:	State (that is, country) of residence: Sweden	
Name and address: (Familyname followed by given name: for a legal en	ity, full official designation. The cddress must include postal code and name of country.)	
Oveby, Claes Nils Anders väg 27 S-232 51 ÅKARP, Sweden		
State (that is, country) of nationality:	State (that is, country) of residence: Sweden	
Name and address: (Familynamefollowedby givenname: for a legal en	tity, full official designation. The address must include postal code and name of country:)	
Wallén, Göran Stationsgatan 13 S-244 63 KÄVLINGE, Sweden		
	;	
State (that is, country) of nationality:	State (that is, country) of residence: Sweden	
Further applicants are indicated on another continuation	sheet.	

Sheet No. . . 3

International application No. PCT/SE98/00970

Box No. III AGENT OR COMMON REPRESENTATIVE; OR ADDRESS FOR CO	RRESPONDENCE
The following person is X agent common representative	
and X has been appointed earlier and represents the applicant(s) also for international pre-	liminary examination.
is hereby appointed and any earlier appointment of (an) agent(s)/common represer	ntative is hereby revoked.
is hereby appointed, specifically for the procedure before the International Prelimi	1
the agent(s)/common representative appointed earlier.	
Name and address: (Family name followed by given name: for a legal entity, full official designation. The address must include postal code and name of country.)	Telephone No.:
The address must include postal code and name of country.)	046-36 22 97
Sundell, Håkan	Facsimile No.:
AB TETRA PAK Ruben Rausings gata	
S-221 86 LUND, Sweden	046-13 79 23
	Teleprinter No.:
·	32140 TPLUND
Address for correspondence: Mark this check-box where no agent or common respace above is used instead to indicate a special address to which correspondence	epresentative is/has been appointed and the should be sent.
Box No. IV BASIS FOR INTERNATIONAL PRELIMINARY EXAMINATION	, .
Statement concerning amendments:*	
1. The applicant wishes the international preliminary examination to start on the basis of	:
X the international application as originally filed	
the description as originally filed	
as amended under Article 34	
the claims as originally filed	
as amended under Article 19 (together with any accompanying	g statement)
as amended under Article 34	,
the drawings as originally filed	
as amended under Article 34	
2. The applicant wishes any amendment to the claims under Article 19 to be consider	
3. The applicant wishes the start of the international preliminary examination to be po	ostponed until the expiration of 20 months
from the priority date unless the International Preliminary Examining Authority under Article 19 or a notice from the applicant that he does not wish to make such	amendments (Rule 69.1(d)). (This check-
box may be marked only where the time limit under Article 19 has not yet expired	<i>(.)</i>
* Where no check-box is marked, international preliminary examination will start on	the basis of the international application
as originally filed or, where a copy of amendments to the claims under Article 19 and/or a under Article 34 are received by the International Preliminary Examining Authority before or the international preliminary examination report, as so amended.	re it has begun to draw up a written opinion
Language for the purposes of international preliminary examination:	
which is the language in which the international application was filed.	
which is the language of a translation furnished for the purposes of internation	onal search.
which is the language of publication of the international application.	
which is the language of the translation (to be) furnished for the purposes of inter	mational preliminary examination.
Box No. V ELECTION OF STATES	
The applicant hereby elects all eligible States (that is, all States which have been designed the PCT)	ated and which are bound by Chapter II of
excluding the following States which the applicant wishes not to elect:	

Sheet No. . . 4

International application No.

PCT/SE98/00970

		····		PC1/3E96	5/009/0
Box No.	VI CHECK LIST				
The demand is accompanied by the following elements, in the language referred to in Box No. IV, for the purposes of international preliminary examination:				onal Preliminary uthority use only	
24	0. 1 1, 10. 110 parposes s			received	not received
l. tra	nslation of international application	:	sheets		
2. am	endments under Article 34	:	sheets		
	by (or, where required, translation) of endments under Article 19	:	sheets		
	oy (or. where required. translation) of tement under Article 19	:	sheets		
5. let	ter	:	sheets		
6. oth	er (specify)	:	sheets		
The dem	and is also accompanied by the item(s) m	arked below:	· · · · · · · · · · · · · · · · · · ·		
1.	fee calculation sheet		4. statement ex	xplaining lack of sign	ature
2.	separate signed power of attorney			and or amino acid sequadable form	uence listing in
3.	copy of general power of attorney; reference number, if any:		6. other (speci	•	
Box No.	VII SIGNATURE OF APPLICANT,	AGENT OR C	OMMON REPRESE	NTATIVE	
Nexttoead	Next to each signature, indicate the name of the persons igning and the capacity in which the persons igns (if such capacity is not obvious from reading the demand).				
	Håkan Sundell				
	For Internati	onal Preliminary	Examining Authority (ise only ————	
1. Da	te of actual receipt of DEMAND:				
	justed date of receipt of demand due CORRECTIONS under Rule 60.1(b):				
3.	The date of receipt of the demand is A from the priority date and item 4 or 5			The applicar informed acc	
4.	The date of receipt of the demand is Rule 80.5.	WITHIN the po	eriod of 19 months fro	m the priority date as	s extended by virtue of
5.	Although the date of receipt of the dis EXCUSED pursuant to Rule 82.	emand is after the	e expiration of 19 mon	ths from the priority d	ate, the delay in arrival
		For Internationa	al Bureau use only		
Demano	received from IPEA on:				

CHAPTER II

PCT

FEE CALCULATION SHEET

Annex to the Demand for international preliminary examination

International	For International Preliminary Examining Authority use only
application NoPCT/SE98/00970]
Applicant's or agent's file reference TP 1239	Date stamp of the IPEA
Applicant	
TETRA LAVAL HOLDINGS & FINA	ANCE S A
Calculation of prescribed fees	
Preliminary examination fee	4.200:- P
2. Handling fee (Applicants from certain States are entitled to a reduction of 75% of the handling fee. Where the applicant is (or all applicants are) so entitled, the amount to be entered at H is 25% of the handling fee.)	1.250:- H
3. Total of prescribed fees Add the amounts entered at P and H and enter total in the TOTAL box	5.450:- TOTAL
Mode of Payment	
authorization to charge deposit cash	
cheque revenue	stamps
postal money order coupons	,
bank draft other (sp	pecify):
Deposit Account Authorization (this mode of payment may not be The IPEA/ SE X is hereby authorized to charge the	total fees indicated above to my deposit account.
(this check-box may be marked one authorized to charge any deficie my deposit account.	ly if the conditions for deposit accounts of the IPEA so permit) is hereby incy or credit any overpayment in the total fees indicated above to
16402014 December	
Deposit Account Number Date (day/month/year)	Signature Håkan Sundell

Form PCT/IPEA/401 (Annex) (July 1998)

PATENT COOPERATION TREATY

From the

INTERNATIONAL PRELIMINARY EXAMINING AUTHORITY	7	
То:		PCT
Sundell, Håkan		
AB TETRA PAK	•	VDITTEN ODINION
Ruben Rausings gata	`	WRITTEN OPINION
S-221 86 Lund, Sweden		(PCT Rule 66) 990712
		í
	Date of mailing (day/month/year)	28 -05- 1999
Applicant's or agent's file reference	REPLY DUE	within 45 days
TP 1239		from the above date of mailing
International application No. International filing date	(day/month/year)	Priority date (day month/year)
PCT/SE98/00970 22.05.1998		29.05.1997
International Patent Classification (IPC) or both national classificat		20 40 40 4 000 7 0 400
B32 B 1/02,B32B 5/18,B65D 1/02,B29	OC 44/04,B29	3C 49/04,C08J 9/08
Applicant	a+ a1	ć
Tetra Laval Holdings & Finance S.F	. et al	
1. This written opinion is the first (first, etc.)	drawn by this Internat	tional Preliminary Examining Authority.
This written opinion is the <u>first</u> (first, etc.) This opinion contains indications relating to the following ite.	_	ional Fremmary Examining Additionty.
<u> </u>	1115.	
I Basis of the report		
II Priority		
III Non-establishment of opinion with regard to nov	elty, inventive step ar	ıd industrial applicability
IV Lack of unity of invention		
V Reasoned statement under Rule 66.2(a)(ii) with and explanations supporting such statement	regard to novelty, inve	entive step or industrial applicability; citations
VI Certain documents cited		
VII Certain defects in the international application		
VIII Certain observations on the international applica	tion	
3. The applicant is hereby invited to reply to this opinion.		
When? See the time limit indicated above. The applicant r grant an extension, see Rule 66.2(d).	nay, before the expira	tion of that time limit, request this Authority to
How? By submitting a written reply, accompanied, when For the form and the language of the amendments,	e appropriate, by ame see Rules 66.8 and 60	adments, according to Rule 66.3.
Also For an additional opportunity to submit amendment For the examiner's obligation to consider amendment	ents and/or arguments	s, see Rule 66.4 <i>bis</i> .
For an informal communication with the examiner If no reply is filed, the international preliminary examination	•	ished on the basis of this opinion
	ii report win oc estaoi	islied of the basis of this opinion.
The final date by which the international preliminary examination report must be established according to Rule 69.2	is: <u>29.09</u> .	.1999
L		
Name and mailing address of the IPEA/SE	Authorized officer	
Patent- con registreringsverket Telex Box 5055 17979		
S-102 42 STOCKHOLM PATOREG-S	Monika Boh	lin/Els

Telephone No. 08-782 25 00

Facsimile No. 08-667 72 88 Form PCT/IPEA/408 (cover sheet) (January 1994)

WRITTEN OPINION

International application No.

PCT/SE98/00970

I. Basis of the report	*			
1. This opinion has been drawn on the basis of (Substitute sheets which have been furnished to the receiving Office in response to an invitation under Article 14 are referred to in this opinion as "originally filed".):				
the international	application as originally file	xd.		
the description,	pages	, as originally filed,		
·	· ·	, filed with the demand,		
	pages	, filed with the letter of		
the claims,	Nos.	, as originally filed,		
 ,		, as amended under Article 19,		
		, filed with the demand,		
	Nos.	, filed with the letter of		
the drawings,	sheets/fig	, as originally filed,		
	sheets/fig			
	sheets/fig			
2. The amendments have resulte	ed in the cancellation of			
the description,	•			
the claims,	Nos.	-		
	 	-		
the drawings,	sheets/fig	<u>.</u>		
		he amendments had not been made, since they have been considered to go		
beyond the disclosure	as filed, as indicated in the s	supplemental Box (Rule 70.2(c)).		
4. Additional observations, if n	anacenty.			
4. Additional obscivations, if it	ccessary.			
		•		

WRITTEN OPINION

International application No.

PCT/SE98/00970

V.	Reasoned statement under Rule 66.2(a)(ii) with regard to novelty, inventive step or industrial applicability;
	citations and explanations supporting such statement

1. Distribution			
Novelty (N)	Claims	3,8,10-11	YES
	Claims	1-2,4-7,9,12-13	NO NO
Inventive step (IS)	Claims		YES
	Claims	1-13	NO

1 - 13

YES Industrial applicability (IA) Claims 1-13 NO Claims

2. Citations and explanations

Statement

The claimed invention relates to an extruded/blow-moulded bottle or container. In order to reduce the bottle weight and the material consumption, the bottle comprises a layer of foamed plastic material, surrounded by outer, solid layers of the same type of material. The foamed plastic material is a blend of a rigid polymer component, which forms the skeleton or interstices in the foamed wall structure, and a ductile or soft polymer component, which forms a skin or cell wall between the skeleton and interstices.

The following documents have been cited in the search report:

- DE1504359 A D1
- GB 2097403 A D2
- D3 EP 0575809 A2
- DE 19525198 A1 D4

D1 discloses a blow-moulded container having a foamed wall structure with outer, rigid skin layers. The material can be a blend of high impact (ductile) polystyrene (50%) and normal, crystalline (rigid) polystyrene (50%). The blowing agent can be citric acid.

D2 discloses a foamed polyethylene film, produced in a film blowing process. The material is preferably a blend of highdensity, crystalline (rigid) polyethylene and a low-density (ductile) polyethylene. Films with improved mechanical properties could be produced using this polymer composition.

. . . / . . .

WRITTEN OPINION

International application No.

PCT/SE98/00970

Supplemental Box

(To be used when the space in any of the preceding boxes is not sufficient)

Continuation of: V

D3 discloses a polyolefin composition comprising a rigid component (polypropylene) and a ductile component, the latter being a coreshell graft copolymer prepared from a crosslinked rubber-like polymer and a monomer. The composition has good processability, and products made thereof have excellent impact resistance, rigidity and surface appearance. The polyolefin composition can be used to produce bottles with a foamed wall structure (see examples 26-29).

Finally, D4 discloses a blow moulding process for the production of a foamed bottle. According to this document, an outer, rigid skin layer can be formed by coextrusion.

The subject matter of claims 1-2, 4-7, 9 and 12-13 does not differ from the disclosure of D1. Thus, these claims are considered to lack novelty.

D3 teaches the use of a polyolefin composition comprising a rigid component and a ductile component, for the production of foamed articles, for example bottles. D2 teaches the use of high-density polyethylene as a rigid component, and low-density polyethylene as a ductile component, for the production of blown, foamed films. It is considered obvious to a person skilled in the art, to combine the teachings of D2 and D3, and thus use the composition of D2 for the production of foamed, blow moulded bottles. Therefore, claims 3 and 8 are considered to lack inventive step. Further, the subject matter of claims 10-11 is considered obvious to a person skilled in the art, in view of the disclosure of D4. Therefore, these claims are considered to lack inventive step.

The claimed invention is considered to be industrially applicable.

AB Tetra Pak

PATENT DEPARTMENT

Patent- och Registreringsverket Box 5055 102 42 STOCKHOLM

Your reference PCT/SE98/00970

Our reference TP 1239-WO Date 6 July, 1999

International Patent Application No. PCT/SE98/00970

In view of the communication (first written opinion) dated 28th May, 1999 we submit herewith a set of new claims along with our following observations in connection with the above-identified international application.

New claim 1 corresponds essentially to previous claims 1-3, except for the added new feature that all layers are manufactured through a coextrusion process, as stated on last line in the characterizing portion of new claim 1. This new feature is supported by the specification on page 6, lines 27-32.

New claims 2-4 correspond to previous claims 4-6.

None of the cited and discussed documents in said communication, taken alone or in any combination with each other, discloses an extruded/blow moulded bottle having the unique combination of features as set forth in new claim 1, and none of them can therefore be deemed to constitute a bar against novelty and/or inventive level of the bottle in new claim 1.

We therefore look forward to receiving a favourable preliminary examination report on basis of the new claims as submitted herewith.

Yours sincerely

AB TETRA PAK
Patent Department

Håkan Sundell

Encl. new claims in triplicate

AB Tetra Pak

Ruben Rausings gata, S-221 86 Lund, Sweden Telephone +46 46 36 10 00, Telefax +46 46 13 79 23

Reg. No.: 556050-0398

Replacement sheet

Claims

5

10

15

20

- 1. An extruded/blow moulded bottle having an extruded wall structure (10) comprising an intermediate layer (11) of foamed plastic and outer, solid layers (12 and 13) of plastic, **characterized in that** the plastic of the foamed intermediate layer (11) is a mixture of a first, rigid polymer component being selected from the group essentially comprising high density polyethylene and high melt-strength polypropylene, and a second ductile (soft) polymer component being selected from the group essentially comprising low density polyethylene and polypropylene for general purposes, that said plastic of the outer, solid layers (12 and 13) is of the same type as said rigid polymer component of the foamed intermediate layer (11), and in that all layers (11,12,13) are produced through a coextrusion process.
- 2. The extruded/blow moulded bottle as claimed in claim 1, characterized in that the mixing ratio of the first, rigid polymer component to the second, ductile (soft) polymer component in the foamed plastic layer (11) is between 1:3 and 3:1.
 - 3. The extruded/blow moulded bottle as claimed in any of claims 1 and 2, characterized in that the central, foamed plastic layer (11) takes up between 50 and 100% of the total weight of the wall material, while the two outer, surrounding plastic layers (12 and 13) together take up between 0 and 50% of the total weight of the wall material.
 - 4. The extruded/blow moulded bottle as claimed in any of claims 1-3, characterized in that the two outer, surrounding layers (12 and 13) display substantially the same layer thicknesses.

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION International Bureau



INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶:
B32B 1/02, 5/18, B65D 1/02, B29C 44/04, 49/04, C08J 9/08

A1

(11) International Publication Number:

WO 98/53986

(43) International Publication Date:

3 December 1998 (03.12.98)

(21) International Application Number:

PCT/SE98/00970

(22) International Filing Date:

22 May 1998 (22.05.98)

(30) Priority Data:

9702026-7

29 May 1997 (29.05.97)

SE

(71) Applicant (for all designated States except US): TETRA LAVAL HOLDINGS & FINANCE S.A. [CH/CH]; Avenue Général-Guisan 70, CH-1009 Pully (CH).

(72) Inventors; and

- (75) Inventors/Applicants (for US only): ANDERSSON, Thorbjörn [SE/SE]; Assarhusavägen 56, S-240 17 Sandby (SE). ANDREN, Sven [SE/SE]; Älgskyttevägen 19, S-226 53 Lund (SE). BENTMAR, Mats [SE/SE]; Hästhovsgatan 8, S-233 37 Svedala (SE). DALHOLM, Patrik [SE/SE]; Styrbjörn Starkes gränd 6, S-224 77 Lund (SE). OVEBY, Claes [SE/SE]; Nils Anders väg 27, S-232 51 Åkarp (SE). WALLEN, Göran [SE/SE]; Stationsgatan 13, S-244 63 Kävlinge (SE).
- (74) Agent: SUNDELL, Håkan; AB Tetra Pak, Ruben Rausings gata, S-221 86 Lund (SE).

(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, GW, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, US, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG).


Published

With international search report.

(54) Title: AN EXTRUDED/BLOW MOULDED BOTTLE, AS WELL AS A METHOD AND MATERIAL FOR PRODUCING THE BOTTLE

(57) Abstract

An extruded/blow moulded bottle, together with a process for producing the bottle. The bottle has a wall structure (10) comprising a layer (11) of foamed plastic material which is surrounded by outer, solid layers (12 and 13) of plastic of the same type as the plastic in the foamed layer (11). The material in the foamed layer (11) includes a rigid polymer component and a ductile polymer component in a mixing ratio of from 1:3 to 3:1, and in addition the foamed layer (11) constitutes at least 50% of the total weight of the bottle. The bottle is produced by a combined extrusion/blow moulding

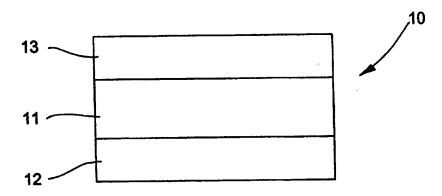

process in which granulate starting material including the two polymer components and a chemical CO₂-generating blowing agent is melted and, under excess pressure, is forced through an annular nozzle during simultaneous expansion of the formed CO₂ blisters. The formed, foamed hose is accommodated in a mould cavity and inflated with the aid of air at high pressure to the desired bottle configuration.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav	TM	Turkmenistan
BF	Burkina Faso	GR	Greece		Republic of Macedonia	TR	Turkey
BG	Bulgaria	HU	Hungary	ML	Mali	TT	Trinidad and Tobago
ВЈ	Benin	IE	Ireland	MN	Mongolia	UA	Ukraine
BR	Brazil	IL	Israel	MR	Mauritania	UG	Uganda
BY	Belarus	IS	Iceland	MW	Malawi	US	United States of America
CA	Canada	IT	Italy	MX	Mexico	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NE	Niger	VN	Viet Nam
CG	Congo	KE	Kenya	NL	Netherlands	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NO	Norway	zw	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's	NZ	New Zealand		
CM	Cameroon		Republic of Korea	PL	Poland		
CN	China	KR	Republic of Korea	PT	Portugal		
CU	Cuba	KZ	Kazakstan	RO	Romania		
CZ	Czech Republic	LC	Saint Lucia	RU	Russian Federation		
DE	Germany	LÏ	Liechtenstein	SD	Sudan		
DK	Denmark	LK	Sri Lanka	SE	Sweden		
EE	Estonia	LR	Liberia	SG	Singapore		

1/5111

AN EXTRUDED/BLOW MOULDED BOTTLE, AS WELL AS A METHOD AND MATERIAL FOR PRODUCING THE BOTTLE

TECHNICAL FIELD

The present invention relates to a bottle or similar container which is produced by a combined extrusion/blow moulding process. The present invention also relates to an extrusion/blow moulding process, together with a granulate starting material for the production of said bottle or similar container.

10

15

20

25

30

35

5

BACKGROUND ART

Bottles and similar containers of plastic are conventionally produced by a combined extrusion/blow moulding process in which granulate starting material of plastic is fed into a screw/cylinder apparatus together with other additives selected for the container production process. By means of the rotating screw fitted with helical blade, the starting material is advanced through the cylinder at the same time as it is melted and the above-mentioned additives are distributed and thoroughly mixed throughout the entire molten plastic mass. The molten, homogeneous plastic mass is pressed through a tool (nozzle) which is disposed at the front end of the apparatus and is provided with an annular aperture for forming a tube or hose. The extruded hose is inserted into and accommodated by a mould cavity formed by moving mould halves, whereafter the hose end thus accommodated between the mould halves is cut and inflated to the inner walls of the mould cavity by means of a blowpipe which is inserted in the hose and is in valve-regulated communication with a source of high pressure air. The compressed air communication is broken and the mould halves are separated from one another for removing the extruded/blow moulded container whose geometric outer configuration exactly corresponds with the configuration defined by the inner walls of the mould cavity.

In the above-described method, for example bottles of high density polyethylene (HDPE) are produced for milk and similar liquid foods. With the aid of modern, high speed filling machines, the freshly produced, empty bottles are filled with the pertinent contents, whereafter the filled bottles are sealed by means of a suitable sealing agent or capsule device which is applied in liquid-tight fashion on the bottle over the open bottle neck. Filled

10

bottles discharged from the filling machine are thereafter collected in stacks or groups suitable for distribution, for further transport out to a sale or consumption point for the packed product.

While the handling of the filled bottles takes place by machine as far as this is at all possible, there nevertheless occur occasions when the bottles or bottle groups must be handled manually as in, for example, certain reloading and relocation operations.

A serious drawback inherent in the prior art extruded/blow moulded bottles of high density polyethylene (HDPE) is that they are excessively, but of necessity, relatively thick-walled and therefore unnecessarily heavy and unwieldy to handle manually. The relatively large wall thickness is, on the other hand, necessary in order that the requisite mechanical strength and rigidity be imparted to the bottle, and such mechanical strength and rigidity deteriorates dramatically and becomes insufficient if the wall thickness of the bottle is less than a minimum value which, at least to some extent, is determined by the relevant bottle shape. In addition to its excessive, but necessary wall thickness, the prior art extruded/blow moulded bottle consumes an unnecessary amount of material and is, therefore, costly in production.

20

25

30

35

15

OBJECTS OF THE INVENTION

One object of the present invention is thus to obviate the abovedescribed drawbacks inherent in the prior art technology.

A further object of the present invention is to realise an extruded/blow moulded bottle of plastic with greatly reduced material weight, but maintained desired superior mechanical strength and rigidity in order to be able to be handled easily and conveniently.

These and other objects and advantages will be attained according to the present invention as a result of the extruded/blow moulded bottle as defined in independent Claim 1.

Further expedient embodiments of the bottle according to the present invention have moreover been given the characterizing features as set forth in appended subclaims 2 to 6.

A further object of the present invention is to realise a combined . extrusion/blow moulding operation for producing such weight-reduced, mechanically strong and rigid plastic bottles. This object has been attained

15

20

25

30

35

according to the present invention by means of the process as defined in independent Claim 7. Expedient embodiments of the process according to the present invention have further been given the characterizing features as set forth in appended subclaims 8 to 11.

Yet a further object of the present invention is to realise a suitable starting material of plastic for producing the extruded/blow moulded bottle. This object is attained according to the present invention by means of the granulate plastic material as defined in independent Claim 12.

10 OUTLINE OF THE INVENTION

The material in the foamed intermediate layer in the extruded/blow moulded plastic bottle should thus consist of a mixture of a first rigid polymer component and a second, soft (ductile) polymer component, of which the first, rigid component forms the skeleton or interstices in the foamed wall layer structure, while the second, soft (ductile) polymer component forms a skin or cell wall between the above-mentioned skeleton or interstices, respectively. Preferably, the rigid and ductile (soft) polymer components are of the same polymer type.

Examples of such rigid polymer components which have proved to be usable in the foamed intermediate layer material in the extruded/blow moulded plastic bottle according to the present invention may be high density polyethylene (HDPE), high melt-strength polypropylene (HMS PP), etc., while examples of such ductile (soft) polymer components which have proved to be usable in the foamed intermediate layer material may be low density polyethylene (LDPE), polypropylene for general purposes (GP PP), etc.

A particularly preferred combination of rigid polymer component and ductile (soft) polymer component is, according to the present invention, low density polyethylene (LDPE) and high density polyethylene (HDPE) in which the mixing ratio of LDPE to HDPE is 1:3-3:1 based on weight. Optimum results concerning the weight and rigidity in the extruded/blow moulded plastic bottle according to the invention are achieved when the mixing ratio of LDPE to HDPE is 1.5:1.

The rigid, skeleton-forming polymer component in the foamed . intermediate layer in the extruded/blow moulded plastic bottle according to the present invention may also be defined as a polymer component which

has a high crystallisation degree (high crystalline), high density, few short chain branches per 1000 C atoms and no long chain branches at all. Correspondingly, the ductile (soft) polymer component may be defined as a polymer component which has low crystallisation degree (low crystalline), low density, many short chain branches per 1000 C atoms and also long chain branches. Concerning the rigid polymer component of HDPE, this implies a density in the range of 950-970 and a melt index in the range of 0.5-1.5, while, for the ductile (soft) polymer component of LDPE, this implies a density in the range of 915-922 and a melt index in the range of 4.5-8.5.

5

10

15

20

25

30

35

The chemical blowing agent with which the mixture of the rigid and ductile (soft) polymer components is to be expanded or foamed may, according to the present invention, be sodium hydrocarbonate and/or citric acid, preferably a mixture of these two blowing agents in stoichiometric proportions. The total quantity of blowing agent which is employed in the production of an extruded/blow moulded plastic bottle by the method according to the present invention may vary from approx. 0.5 to approx. 2.5% of the total weight of the mixture.

BRIEF DESCRIPTION OF THE ACCOMPANYING DRAWING

The present invention will now be described in greater detail hereinbelow with the aid of a preferred but non-restrictive Example and with reference to the accompanying Drawing which schematically illustrates a cross section of a wall material of an extruded/blow moulded plastic bottle according to the present invention.

DESCRIPTION OF PREFERRED EMBODIMENT

According to the preferred embodiment which is shown schematically on the accompanying Drawing, the wall material carrying the generic reference numeral 10 comprises, in an extruded/blow moulded plastic bottle, a central layer 11 and two outer skin layers 12 and 13 on both sides of the central layer 11.

The material in the central, foamed layer 11 consists, as was mentioned above, of a mixture of a first rigid polymer component and a second ductile (soft) polymer component which, in the relevant embodiment, is an HDPE component and an LDPE component, respectively, of which the HDPE component has a density in the range of 950-970 and a

10

15

20

25

30

35

melt index in the range of 0.1-1.5, while, correspondingly, the LDPE component has a density in the range of 915-922 and a melt index in the range of 4.5-8.5. The mixing ratio between the two polymer components (i.e. LDPE:HDPE) should be between 1:3 and 3:1, preferably 1.5:1, in order to give optimum results as regards rigidity/thickness of the produced plastic bottle.

The two outer wall layers 12 and 13 may be the same or different, but are preferably the same and produced from a polymer possessing a high modulus of elasticity, for example HDPE, whereby high strength and rigidity will be attained as a result of the so-called I-beam effect, as will be well-known to a person skilled in the art.

The relative thicknesses of the central, foamed wall layer 11 and the two outer homogeneous wall layers 12 and 13 are preferably such that the central, foamed wall layers 11 takes up approx. 50-100% of the total weight of the wall material, while the two outer, homogeneous layers 12 and 13 together constitute approx. 0-50% of the total weight of the wall material.

A bottle for packing and transporting liquid foods, for example milk, for refrigerated distribution is produced according to the present invention by means of a combined (co-)extrusion/blow moulding process comprising a first (co-)extrusion step and a subsequent, second blow moulding step.

Granulate starting material containing, i) a first rigid polymer component, preferably HDPE, ii) a second ductile (soft) polymer component (LDPE) and iii) a chemical blowing agent, preferably sodium hydrocarbonate and/or citric acid, is fed into a screw/cylinder apparatus through a replenishment hopper disposed at the rear end of the apparatus. The ratio between the components included in the granulate starting material is such that the ratio of the ductile (soft) LDPE component to the rigid HDPE component lies within the range of 1:3-3:1, preferably 1.25:1. The quantity of the chemical blowing agent should be 0.5-2.5% of the total weight of the granulate starting material. The infed granulate starting material is subjected to high temperature in an infeed zone of the screw/cylinder apparatus in which the free area between the walls of the cylinder and the screw core is minimised in order to create superior mixing conditions for the infed components in the starting material and, at the same time as the starting material is heated to such an elevated temperature that the chemical blowing agent (sodium hydrocarbonate and citric acid) is decomposed for the

10

15

20

25

30

35

formation of carbon dioxide and sodium hydrocarbonate and citric acid residues acting as nucleation seats in the molten plastic mass.

The molten, homogeneously mixed plastic starting material is advanced by the rotating screw fitted with helical blades from the infeed zone to a further compression zone, at the same time as the starting material is cooled for the formation of a cool homogeneous mixture under a pressure of between 200 and 300 bar excess pressure. At this high pressure, the released carbon dioxide is converted into overcritical state.

The cooled, pressurised plastic melt is thereafter forced out through a tool (nozzle) which is disposed at the front end of the screw/cylinder apparatus and is provided with an annular nozzle aperture, for the formation of a hose at the same time as the overcritical carbon dioxide instantaneously expands at the pressure transition from the abovementioned excess pressure of 200-300 bar to normal atmospheric pressure, for the formation of the foamed wall layer structure.

The extruded, foamed hose of LDPE/HDPE is introduced into the region between two movable mould halves which are brought together for the formation of a mould cavity in which the hose is accommodated. The hose accommodated in the mould cavity is cut and the two mould halves are transferred to a mould blowing station in which the hose portion accommodated between the mould halves is inflated, by means of a blowpipe inserted into the hose, towards the inner walls in the mould cavity defined by the mould halves. Thereafter, the mould halves are separated from one another for removing (or stripping) the blow moulded bottle whose geometric outer configuration thus substantially corresponds to the inner mould cavity configuration.

In an alternative embodiment, the above-mentioned screw/cylinder apparatus may be supplemented with at least one additional screw/cylinder apparatus connected to the same common tool for co-extrusion of solid (dense) outer layers 12 and 13, as shown on the Drawing. Such a wall structure affords an extremely high mechanical strength and rigidity at very low material consumption seen as a whole.

In the above-described method according to the present invention, extruded/blow moulded plastic bottles may be produced with a nominal inner volume of 11. with the same or comparable rigidity and strength as a

conventional bottle produced from HDPE, but with up to 30% less material consumption.

The present invention should not be considered as restricted to that described above and shown on the Drawing, many modifications being conceivable without departing from the scope of the appended Claims.

30

WHAT IS CLAIMED IS:

- 1. An extruded/blow moulded bottle, characterized in that it has a wall structure (10) comprising a layer (11) of foamed plastic material of a first, rigid polymer component and a second, ductile (soft) polymer component.
 - 2. The extruded/blow moulded bottle as claimed in Claim 1, characterized in that the foamed layer (11) is surrounded by outer, solid layers (12 and 13) of plastic of the same type as said first, rigid polymer component in the foamed central plastic layer (11).
- 3. The extruded/blow moulded bottle as claimed in Claim 1 or 2, characterized in that the first, rigid polymer component is selected from the group essentially comprising high density polyethylene and high melt-strength polypropylene; and that the second, ductile (soft) polymer component has been selected from the group essentially comprising low density polyethylene and polypropylene for general purposes, said first and said second polymer components being of the same polymer type.
- 20 4. The extruded/blow moulded bottle as claimed in any of the preceding Claims, characterized in that the mixing ratio of the first, rigid polymer component to the second, ductile (soft) polymer component in the foamed plastic layer (11) is between 1:3 and 3:1.
- 5. The extruded/blow moulded bottle as claimed in any of Claims 2 to 4, characterized in that the central, foamed plastic layer (11) takes up between 50 and 100% of the total weight of the wall material, while the two outer, surrounding plastic layers (12 and 13) together take up between 0 and 50% of the total weight of the wall material.
 - 6. The extruded/blow moulded bottle as claimed in any of Claims 2 to 5, characterized in that the two outer, surrounding layers (12 and 13) display substantially the same layer thicknesses.
- 35 7. A process for producing an extruded/blow moulded bottle as claimed Claims 1, characterized in that a granulate plastic material

comprising a first, rigid polymer component, a second, ductile (soft) polymer component and a chemical, carbon dioxide-generating blowing agent is carefully mixed during simultaneous heating for decomposition of the chemical blowing agent for the formation of a molten plastic mass with homogeneously distributed carbon dioxide blisters; that the thus molten, carbon dioxide-containing plastic mass is compressed to an excess pressure in the range of between 300 and 400 atmospheres during simultaneous cooling for converting the carbon dioxide blisters into an overcritical state; that the compressed, cooled plastic melt is forced through an annular nozzle aperture during simultaneous expansion of the overcritical carbon dioxide blisters for the formation of a hose of foamed structure; that the foamed hose is accommodated in a mould cavity formed between moving mould halves whose inner defining walls determine the geometric outer configuration of the finished bottle; that the hose accommodated in the mould cavity is inflated by means of a blowpipe at least party inserted into the hose and in communication with a source of high pressure air; and that the hose thus inflated against the inner walls of the mould cavity is removed from the mould cavity for the formation of the extruded/blow moulded bottle displaying foamed wall structure.

20

25

15


5

10

- 8. The process as claimed in Claim 7, characterized in that the first, rigid polymer component is selected from the group essentially comprising high density polyethylene and high melt-strength polypropylene; that the second, ductile polymer component is selected from the group essentially comprising low density polyethylene and polypropylene for general purposes; and that the mixing ratio between the first, rigid polymer component and the second, ductile (soft) polymer component is set in the region between 1:3 and 3:1.
- 30 9. The process as claimed in Claim 7 or 8, characterized in that the chemical, carbon dioxide-generating blowing agent is selected from the group essentially comprising sodium hydrocarbonate, citric acid and mixtures thereof; and that the quantity of blowing agent is approx. 0.5-2.5% of the total weight of the mixture.

- 10. The process as claimed in any of Claims 7 to 9, characterized in that the molten, cooled plastic mass is forced through the annular nozzle aperture at the same time as molten, homogeneous polymer, by a coextrusion process, is forced through corresponding, annular nozzle apertures for the formation of the surrounding outer layer of the foamed central hose layer.
- 11. The process as claimed in Claim 10, characterized in that the homogeneous polymer for the two surrounding outer layers consists of a 10 rigid polymer of the same type as the rigid polymer component in the foamed central hose layer.
- 12. A granulate plastic material for carrying out the process as claimed in Claim 7, characterized in that it includes a first, rigid polymer component, a 15 second, ductile (soft) polymer component and a chemical, carbon dioxidegenerating blowing agent, the mixing ratio between the first, rigid polymer component and the second, ductile (soft) polymer component is between 1:3 and 3:1 based on weight, and the quantity of the chemical carbon dioxidegenerating blowing agent is approx. 0.5-2.5% of the total weight of the 20 mixture.
 - The granulate plastic material as claimed in Claim 12, characterized 13. in that the chemical carbon dioxide-generating blowing agent has been selected from the group essentially comprising sodium hydrocarbonate, citric acid or mixtures thereof.
- 25

1/1

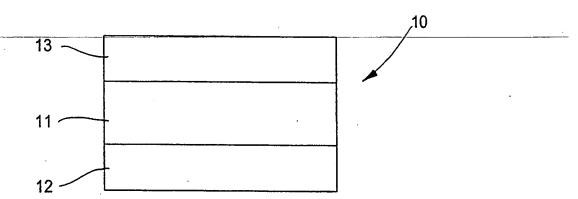

INTERNATIONAL SEARCH REPORT

International application No. PCT/SE 98/00970

A. CLASSIFICATION OF SUBJECT MATTER

IPC6: B32B 1/02, B32B 5/18, B65D 1/02, B29C 44/04, B29C 49/04, C08J 9/08 According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC6: B29C, B32B, C08J

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE, DK, FI, NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

MENTS CONSIDERED TO BE RELEVANT	
Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
DE 1504359 A (HAVEG INDUSTRIES INC.), 20 February 1969 (20.02.69), page 3, first paragraph, page 4, line 1-6, page 5, line 1-4, page 6, fourth paragraph, page 7, page 14, first paragraph, claims 1-2	1-2,7,12-13
	3-6,8-11
	
GB 2097403 A (BXL PLASTICS LIMITED), 3 November 1982 (03.11.82), page 1, line 31 - line 35; page 1, line 58 - page 2, line 6, examples 1-2, claim 1, part B, abstract	12-13
·	3-6,9
 ·	
Ì	Citation of document, with indication, where appropriate, of the relevant passages DE 1504359 A (HAVEG INDUSTRIES INC.), 20 February 1969 (20.02.69), page 3, first paragraph, page 4, line 1-6, page 5, line 1-4, page 6, fourth paragraph, page 7, page 14, first paragraph, claims 1-2 GB 2097403 A (BXL PLASTICS LIMITED), 3 November 1982 (03.11.82), page 1, line 31 - line 35; page 1, line 58 - page 2,

Further documents are listed in the continuation of Box	C.	X See patent family annex.
Special categories of cited documents:	"T"	later document published after the international filing date or priority
document defining the general state of the art which is not considered to be of particular relevance		date and not in conflict with the application but cited to understand the principle or theory underlying the invention
erlier document but published on or after the international filing date	"X"	document of particular relevance: the claimed invention cannot be
document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other		considered novel or cannot be considered to involve an inventive step when the document is taken alone
•	"Y"	document of particular relevance: the claimed invention cannot be
means		considered to involve an inventive step when the document is combined with one or more other such documents, such combination
document published prior to the international filing date but later than		being obvious to a person skilled in the art
the priority date claimed	"&"	document member of the same patent family
of the actual completion of the international search	Date	of mailing of the international search report
-		1 4 -69- 1998
Sept 1998		
e and mailing address of the ISA/	Autho	rized officer
dish Patent Office		
5055, S-102 42 STOCKHOLM	Mon	ika Bohlin
imile No. + 46 8 666 02 86		none No. + 46 8 782 25 00
	Special categories of cited documents: document defining the general state of the art which is not considered to be of particular relevance erlier document but published on or after the international filing date document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) document referring to an oral disclosure, use, exhibition or other means document published prior to the international filing date but later than the priority date claimed of the actual completion of the international search Sept 1998 e and mailing address of the ISA/ dish Patent Office 5055, S-102 42 STOCKHOLM	document defining the general state of the art which is not considered to be of particular relevance erlier document but published on or after the international filing date document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) document referring to an oral disclosure, use, exhibition or other means document published prior to the international filing date but later than the priority date claimed of the actual completion of the international search Date of the actual completion of the ISA/ dish Patent Office 5055, S-102 42 STOCKHOLM Month

INTERNATIONAL SEARCH REPORT

International application No. PCT/SE 98/00970

	PCT/SE 98/	00970
C (Continu	ation). DOCUMENTS CONSIDERED TO BE RELEVANT	
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No
х	EP 0575809 A2 (KANEGAFUCHI KAGAKU KOGYO KABUSHIKI KAISHA), 29 December 1993 (29.12.93), page 2, line 1 - line 20; page 2, line 55 - page 3, line 10, examples 26-29, claims 19-20, abstract	12-13
Y	DE 19525198 A1 (GEIGER TECHNIK GMBH & CO.), 13 June 1996 (13.06.96), column 3, line 6 - line 26	10-11
A		1-9,12-13
A	DE 19511611 A1 (WELLA AG), 2 October 1996 (02.10.96), column 2, line 26 - line 64; column 3, line 12 - line 24	1-13
P,A	 WO 9728050 A1 (WELLA AKTIENGESELLSCHAFT), 7 August 1997 (07.08.97)	1-13
	· ~-	

INTERNATIONAL SEARCH REPORT

Information on patent family members

27

International application No. /00970

	7/07/98	PCT/SE 98,
--	---------	------------

	Patent document d in search repor	rt	Publication date		Patent family member(s)		Publication date
DE	1504359	Α	20/02/69	NL	6404048	Α	23/10/64
GB	2097403	A	03/11/82	NON	======================================		
EP	0575809	A2	29/12/93	CA	2097941	A	10/12/93
				DE	69308174	D,T	07/08/97
				JP	6299006	A	25/10/94
				US	5733975	Α	31/03/98
				JP	533 9 433		21/12/93
				SG	42325		15/08/97
				JP	5339434		21/12/93
				JP	6073192	A 	15/03/94
DE	19525198	A1	13/06/96	NON	E		
DE	19511611	A1	02/10/96	AU	4432296	A	10/07/96
				BR	9506839	Α	14/10/97
				CN	1141024	Α	22/01/97
				DE	29520936	_	30/05/96
				DE	59502110	_	00/00/00
				EP	0746503	A,B	11/12/96
				ES	2095199	T	16/02/97
				JP	9509638		30/09/97
				WO	9619384	A 	27/06/96
WO	9728050	A1	07/08/97	AU	1191797	A	22/08/97
				DE	19603906		07/08/97
				EP	0815016		07/01/98